

## **MODEL SLX500**

These slim line soft serve machines produce the best tasting gravity-fed frozen desserts...smooth, creamy and consistent yogurt, ice cream or sorbet! The 22" wide footprint allows for more units in a smaller space. The SLX500 is the perfect yogurt shop freezer and is great for adding flavors to ice cream shops, too! Great for QSRs, retirement villages and hospital cafeterias.

## **The Electro Freeze Advantage**

- Meets ADA Specifications for self service applications
- Innovative Solutions providing the best product quality in the industry.
- **Precision dual Smart control monitors** temperature and Consistency to provide superior taste and quality.
- Multi-function LED display with manager smart tools.
- Superior low temp refrigeration system provides Best in class production and product quality
- Compact design with a small foot print.
- **Twist feature** will dispense two separate flavors or equal combinations of both.
- Self-closing handles eliminate waste
- Patented auger gently blends reducing agitation and maintaining product quality and consistency.
- Durable polymer, long wearing nonreversible blades offer lower maintenance costs and better product quality
- Simple to operate and easy to clean
- Experience Tells Electro Freeze has been manufacturing quality frozen treat machines since 1929. Superior engineering, product innovations, sturdy construction, quality craftsmanship and dependable performance are Electro Freeze hallmarks.
- Superior Service Support backed by a worldwide distributor network.

Soft Serve Freezer Genesis Series™ featuring €








# Let VQM help manage your frozen dessert business more effectively.

electrofreeze.com

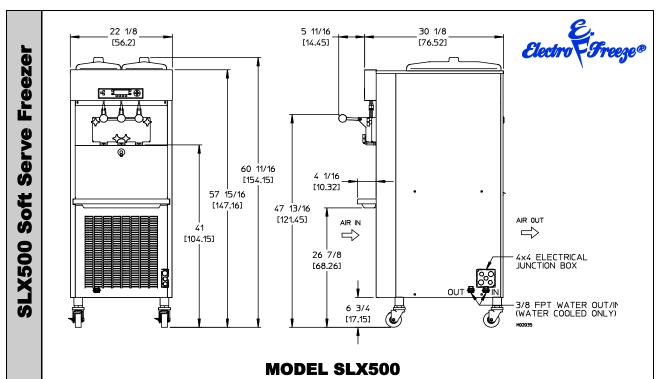

Due to continual product improvements all specifications are subject to change without notice.

Weights	lbs.	kgs.			
Crated	568	257			
	cu.ft.	cu.m.			
Volume	58.42	1.65			
Dimensions	in.	cm.			
Width	22-1/8	56.20			
Depth	30-1/8	76.52			
Height	60-11/16	154.15			
Electrical	Maximum	Minimum	Pole	s (P)	
SLX500	Fuse Size	<b>Circuit Ampacity</b>	Wire	s (W)	
208-230/60/1 Air	40	30	2P 2	2P 2W	
208-230/60/1 Wate	r 40	29	2P 2	2P 2W	
208-230/60/3 Wate	r 25	20	3P 3	3P 3W	
208-230/60/3 Air	25	20	3P 3	W	
Electrical characterist	ics other than	above available on	request	from	
factory or local distribu	utor. Check n	ameplate for exact	electrical	data.	
Bidding Spec					
		Hz	Ph		
Electrical: Volt					
Electrical: Volt Cooling:		Neutral	_Yes	No	

### Electrical

One dedicated electrical connection is required. Manufactured to be permanently connected. See electrical chart for the proper requirement. Consult your local electrical codes for cord and receptacle specifications.

### **Beater Motor**

Two, 2 hp.

#### **Refrigeration Systems**

One, 11,000 Btuh. R404a. Separate Hopper Refrigeration, One, 500 Btuh, R134a. Btuh may vary depending on compressor used.

#### **Air and Water Cooled**

6" (15.2 cm) air space required on front & rear panel for proper air circulation and be open on the top.

Mix Hopper Capacity: two - 16 quarts (15 liters) each Freezing Cylinder Capacity: two - 3.7 quarts (3.5 liters) each

Certified and/or listed by:



\*UL listed and listed by Underwriters Laboratories under Canadian National Standard C22.2 No. 120-M91 (R2008)

Electro Freeze div. of H.C. Duke & Son, LLC 2116-8th Avenue, East Moline, Illinois 61244 Phone (309) 755-4553 • (800) 755-4545 FAX (309) 755-9858 E-mail: sales@electrofreeze.com • www. electrofreeze.com

#### **Authorized Distributor**

HC184293 Printed in U.S.A. 10/13